


OVERHEAD TRACK SCALE



**CHOICE OF
INDICATORS**

- Accurate
- Easy to Install
- Trade Approved
- High Strength
- Flexible

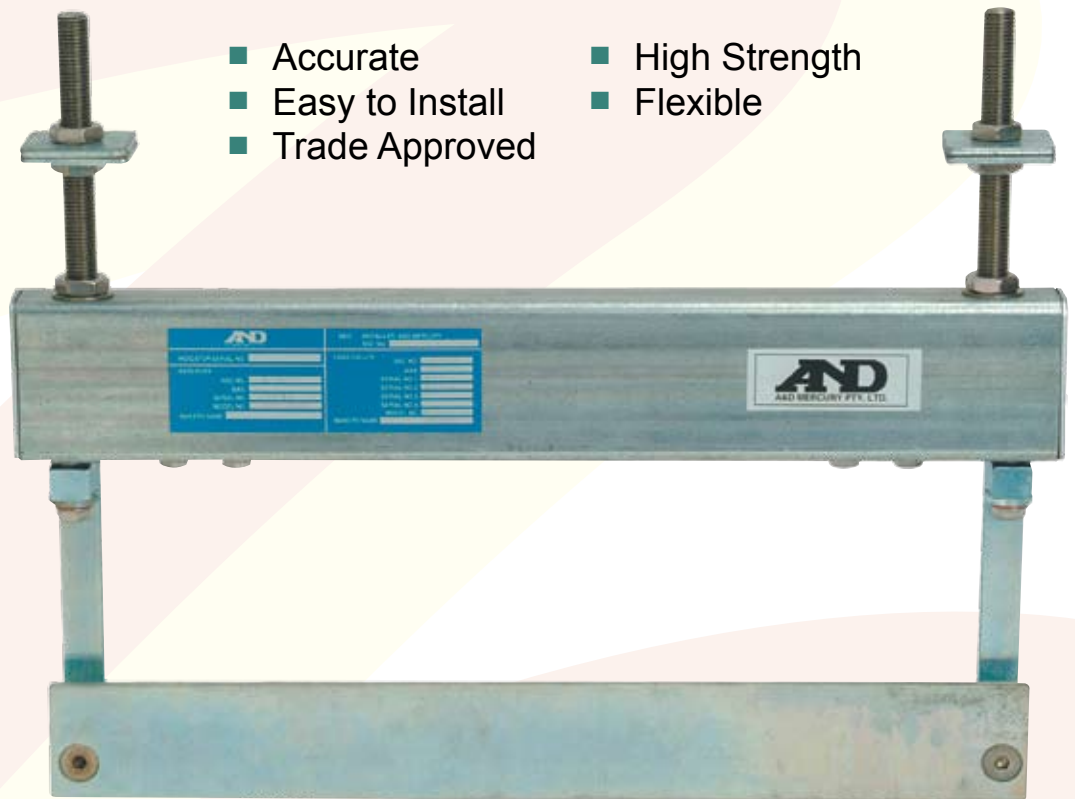

FEATURES

- Trade Approved (NMI 6/18/17B)
- Maximum Capacity 600kg
- Galvanised Finish
- Simple Installation
- Strong, Robust Design with up to 300% Overload Protection.
- Standard Track Sizes to Suit Customer Requirements (300mm -1200mm).
- Waterproof Track Scale for Wet Environments
- Centre and End Load Compensation Feature for Accurate Weighing
- Choice of Indicators to Suit Various Environments/Applications
- Choice of Optional Bracket Lengths
- Can be used with hooks, slides and pulley hook assemblies

SPECIFICATIONS

- Capacity: Up to 600kg Maximum
- Standard Rail Sizes: 300mm to 1200mm (Non-Standard Sizes Upon Request)
- Loadcells: Shear Beam Type (1t Capacity)
- Weigh Rail Thickness: 12mm



by **AD**
A&D MERCURY PTY LTD

Accuweigh Pty Ltd

WESTERN AUSTRALIA (HEAD OFFICE):
PHONE: (08) 9259 5535

SOUTH AUSTRALIA OFFICE:
PHONE: (08) 8447 5011

NEW SOUTH WALES (SYDNEY) OFFICE:
PHONE: (02) 9728 4877



ACCUWEIGH

www.accuweigh.com.au

VICTORIA OFFICE:
PHONE: (03) 9548 5554

NEW SOUTH WALES (NEWCASTLE) OFFICE:
PHONE: (02) 4966 8900

QUEENSLAND OFFICE:
PHONE: (07) 3265 5520